



DISHWASHERS WITH A SOLID REPUTATION



Swiss Commercial Equipment started its operations in Canada in 1992. Swiss introduced to North America dishwashers that had been engineered and manufactured in Switzerland since the late 1960's. Technology has evolved and so have the Swiss dishwashers. Through this evolution, the main concern has remained to satisfy the growing need for cleaner and better results, low cost and trouble free operation with the highest possible output.

The mission at Swiss Commercial Equipment is to satisfy these needs and respect the environment. To that end, our dishwashers have low water, electrical and chemical requirements. One look at the Swiss 25PLC, or the upright model, Swiss 65PLC, is enough to convince you of the quality of these products.

Swiss Commercial Equipment delivers technologically advanced dishwashers with a solid reputation. Visit our website to learn more about the Swiss 25PLC and the Swiss 65PLC as well as our other commercial products.



25PLC

The Swissh 25PLC is the most powerful undercounter dishwasher available in the market. With its maximum output of 48 racks per hour, the Swissh 25PLC performs like a passthrough machine for the modest price of an undercounter model. It was developed to answer the most fundamental demands of every operator: great results, low operation cost and durability. Swissh is able to satisfy these demands and remain environmentally friendly. It uses only 3 liters (0.79 US gal) per wash: that's less water and chemicals down the drain. Now that's innovation; environmentally friendly and more money in your pocket!



Dishwasher

WITH A SOLID REPUTATION



DISHWASHER OR GLASSWASHER?

THE UNIQUE ELECTRONIC DESIGN MAKES THE SWISSH 25 PLC ADAPTABLE TO THE NEEDS OF YOUR BUSINESS. **INNOVATIVE** WITH ITS 2 PROGRAMMABLE CYCLES INDEPENDENTLY ADJUSTABLE FROM 30 TO 360 SECONDS. CYCLE ONE FOR YOUR DISHES, CYCLE TWO FOR YOUR GLASSES OR YOUR CUPS - TELL US WHAT YOU NEED. EACH CYCLE IS **ADJUSTABLE TO THE SECOND!** THE SWISSH WILL GIVE YOU SPARKLING RESULTS WITH LOW WATER, ELECTRICAL AND CHEMICAL CONSUMPTION. **WHY WASTE YOUR MONEY AND OUR PLANET'S MOST PRECIOUS RESOURCE? YOU DESERVE THE BEST AND YET BE THE ENVIRONMENT'S BEST FRIEND.**

INCLUDED!

- 2 years warranty on parts, 1 year on labor
- Integrated booster
- Top and side panels
- Integrated detergent and rinse pumps
- 2 racks
- Start-up chemical kit *

As ALWAYS!

- Environmentally friendly
- Only 3 liters of water per wash (or 0.79 US gal) - less water and chemicals down the drain
- Precise injection of detergent and rinse agent
- Self calibration of detergent intake to reflect water hardness fluctuations
- Integrated diagnostic test without removing front panel

* where applicable




Designed in Switzerland since 1967,
Manufactured in Canada since 1992,
Innovating for over 35 years



TOLL FREE CANADA AND U.S.A. 1-888-794-7749

TWO YEARS WARRANTY ON PARTS

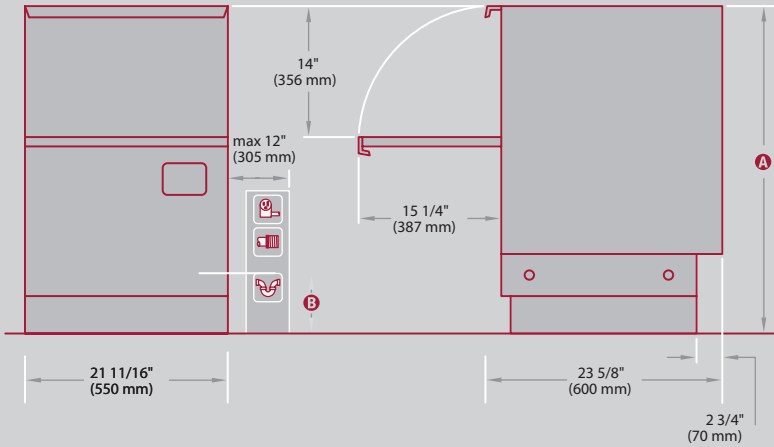

SPECIFICATIONS SUMMARY:

Maximum hourly output:	48 standard racks; 864 - 9" plates; 2,352 - 2 1/2" glasses
Water consumption :	3 liters per rack (0.79 U.S. gal)
Cycle time:	Adjustable from 30 - 360 seconds
Motor pump:	1 Hp
Detergent & Rinse pump:	Integrated and controlled by PLC (Programmable Logic Control)
Ease of service:	Adjustment & component replacement from the front Technical phone assistance 24/7
Warranty:	2 years on parts; 1 year on labor.

BASE	MEASURE A	MEASURE B
0"	32 1/4" (819 mm)	4" max (100 mm)
4" (Standard)	34 1/2" - 36 1/2" (876 mm - 927 mm)	6" max (150 mm)
6"	36 1/2" - 38 1/2" (927 mm - 978 mm)	8" max (200 mm)



SUPPLY VOLTAGE	AMPS	DESCRIPTION
208-240/60/ 1	37A*	Electrical plug (50A) type 6/50R (e.g. Eagle #1252). (Dishwasher is supplied with power cord and plug)
208-240/60/ 3	24A	Connector box - Dishwasher supplied with power cord only

* For information on availability of 27A or 17A rating, call 1-888-794-7749



Unit is supplied with flexible stainless steel water hose with 3/4" female pipe thread connector
 - 140°F (60°C) recommended water temperature.
 - Minimum 1/2" pipe with 3/4" male pipe thread connector (N.P.S.).
 - Acceptable water flow pressure range : 25-50 psi. If water pressure varies, a water regulator is recommended (by others) with 35 psi setting



Dishwasher is supplied with 30" (750 mm) flexible drain hose and two s/s hose clamps.
 - Dishwasher is drained by gravity (no pump).
 - Inner diameter (ID) of drain hose is 1 1/4" (32 mm).

NOTES:

- Utilities may be placed on either side of the unit provided measures of shaded area are respected
- Reserve place for detergent and rinse chemicals:
 - 4 liters; width 6 1/2" (165 mm), height 12 1/4" (310 mm)
 - 20 liters; width 12 1/4" (310 mm), height 15 1/2" (395 mm)

Technical SPECIFICATIONS



TRULY COMMERCIAL!

- All stainless steel construction (# 304)
- 40 jets for impeccable results
- 1 Hp motor pump
- 208 - 240 Volts, 1 or 3 phase - your choice - no extra cost
- Flexible stainless steel water supply hose
- Final rinse protection to guarantee 180°F (82°C) sanitizing rinse

OPTIONS!

- Compatible with Bosch commercial gas water heaters
- Various extension bases for your specific needs
- Cold water rinse for glasses
- Drain pump



SWISS COMMERCIAL
EQUIPMENT INC.
6060, METROPOLITAN BLVD. EAST
SUITE 200
MONTREAL, QUÉBEC
H1S 1A9

TEL: (514) 524-6005
FAX: (514) 524-3305
TOLL FREE: 1-888-794-7749

E-MAIL: INFO@SWISSH.CA
WWW.SWISSH.COM

THE SWISSH 25 PLC HAS AN HOURLY OUTPUT OF UP TO **48 STANDARD RACKS PER HOUR**. UNLEASH THE POWER OF THE 1HP MOTOR PUMP WITH THE TIP OF YOUR FINGER AND ALTERNATE FROM ONE CYCLE TO ANOTHER TO ACCOMMODATE YOUR WORK LOAD. FROM INSTITUTIONS TO RESTAURANTS OF UP TO 150 SEATS, THANKS TO ITS FLEXIBLE PROPERTIES, THE SWISSH 25 PLC CAN BE INSTALLED IN THE MOST CHALLENGING LOCATION. ITS ADAPTABILITY MAKES IT THE CHAMELEON OF THE INDUSTRY!



Bigger needs?
Ask us about our Swiss 65 PLC