

Swissh Commercial Equipment started its operations in Canada in 1992. Swissh introduced to North America dishwashers that had been engineered and manufactured in Switzerland since the late 1960's. Technology has evolved and so have the Swissh dishwashers. Through this evolution, the main concern has remained to satisfy the growing need for cleaner and better results, low cost and trouble free operation with the highest possible output.

The mission at Swissh Commercial Equipment is to satisfy these needs and respect the environment. To that end, our dishwashers have low water, electrical and chemical requirements. One look at the Swissh 25PLC, or the upright model, Swissh 65PLC, is enough to convince you of the quality of these products.

Swissh Commercial Equipment delivers technologically advanced dishwashers with a solid reputation. Visit our website to learn more about the Swissh 25PLC and the Swissh 65PLC as well as our other commercial products.



65PLC

The Swissh 65PLC is the highest quality upright dishwasher found in the market. With its maximum output of 54 racks per hour, the Swissh 65PLC answers the most fundamental demands of every operator: great results, low operation cost and durability. Swissh is able to satisfy these demands and remain environmentally friendly. It uses only 3 liters (0.79 US gal) of water per wash: that's less water and chemicals down the drain. Now that's innovation; environmentally friendly and more money in your pocket!



WITH A SOLID REPUTATION



DISHWASHER OR GLASSWASHER?

THE UNIQUE ELECTRONIC DESIGN MAKES THE SWISSH 65 PLC ADAPTABLE TO THE NEEDS OF YOUR BUSINESS. INNOVATIVE WITH ITS 2 PROGRAMMABLE CYCLES INDEPENDENTLY ADJUSTABLE FROM 30 TO 360 SECONDS. CYCLE ONE FOR YOUR DISHES, CYCLE TWO FOR YOUR GLASSES OR YOUR POTS - TELL US WHAT YOU NEED. EACH CYCLE IS ADJUSTABLE TO THE SECOND! THE SWISSH WILL GIVE YOU SPARKLING RESULTS WITH LOW WATER, ELECTRICAL AND CHEMICAL CONSUMPTION. WHY WASTE YOUR MONEY AND OUR PLANET'S MOST PRECIOUS RESOURCE? YOU DESERVE THE BEST AND YET BE THE ENVIRONMENT'S BEST ERIEND

INCLUDED

- 2 years warranty on parts,1 year on labor
- Integrated booster
- Integrated detergent and rinse pumps
- 4 racks
- Start-up chemical kit *

As ALWAYS!

- Environmentally friendly
- Only 3 liters of water per wash (or 0.79 US gal) - less water and chemicals down the drain
- Precise injection of detergent and rinse agent
- Self calibration of detergent intake to reflect water hardness fluctuations
- Integrated diagnostic test without removing front panel

* where applicable




Designed in Switzerland since 1967, Assembled in Canada since 1992, Innovating for over 35 years





TWO YEARS WARRANTY ON PARTS

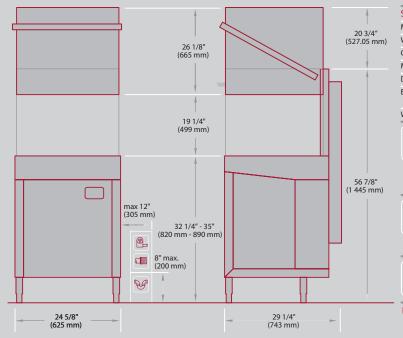

SPECIFICATI	ON SUMMARY			
Maximum hourly output:		54 stan	54 standard racks; 972 - 9" plates; 2,592 - 2 1/2" glasses	
Water consumption :			3 liters per rack (0.79 U.S. gal)	
Cycle time:		Adjusta	Adjustable fom 30 - 360 seconds	
Motor pump:		1.5 Hp	1.5 Hp	
Detergent & Rinse pump:		Integra	Integrated and controlled by PLC (Programmable Logic Control)	
Ease of service:			Adjustment & component replacement from the front Technical phone assistance 24/7	
Warranty:		2 years on parts; 1 year on labor		
	SUPPLY VOLTAGE	AMPS	Description	
	208-240/60/ 1	39A*	Electrical plug (50A) type 6/50R (e.g. Eagle #1252). (Dishwasher is supplied with power cord and plug)	
	208-240/60/ 3	25A	Connector box - Dishwasher supplied with power cord only	
	* For information	on availab	ility of 29A or 19A rating, call 1-888-794-7749	



Unit is supplied with 1 1/2 " drain adaptor

- 60°C (140°F) recommended water temperature.

 Minimum 1/2" pipe with 3/4" male pipe thread connector (N. P.S.).

 Acceptable water flow pressure range: 25-50 psi. If water pressure varies, a water regulator is recommended (by others) with 35 psi setting.



Unit is supplied with 1 1/2" (38 mm) drain adaptor.

- Dishwasher is drained by gravity (no pump).
- 1. Utilities may be placed on either side of the unit provided measures of shaded area are respected
- 2. Reserve place for detergent and rinse chemicals:
 4 liters; width 6 1/2" (165 mm), height 12 1/4" (310 mm)
 20 liters; width 12 1/4" (310 mm), height 15 1/2" (395 mm)

SPECIFICATIONS





THE SWISSH 65 PLC HAS AN HOURLY OUTPUT OF UP TO 54 STANDARD RACKS PER HOUR. UNLEASH THE POWER OF THE 1.5 HP MOTOR PUMP WITH THE TIP OF YOUR FINGER AND ALTERNATE FROM ONE CYCLE TO ANOTHER TO ACCOMMODATE YOUR WORK LOAD. FROM INSTITUTIONS TO RESTAURANTS OF UP TO 200 SEATS, THANKS TO ITS FLEXIBLE PROPERTIES, THE SWISSH 65 PLC CAN BE INSTALLED IN THE MOST CHALLENGING LOCATION . ITS ADAPTABILITY MAKES IT THE CHAMELEON OF THE INDUSTRY!

- All stainless steel construction (#304)
- 40 jets for impeccable results
- 1.5 Hp motor pump
- 208 240 Volts, 1 or 3 phase - your choice - no extra cost
- Flexible stainless steel water supply hose
- Final rinse protection to guarantee 180°F (82°C) sanitizing rinse

- Compatible with Bosch commercial gas water heaters
- Custom made dish tables



SWISSH COMMERCIAL EQUIPMENT INC. 6060, METROPOLITAN BLVD. EAST **SUITE 200** MONTREAL, QUÉBEC H1S 1A9

TEL: (514) 524-6005 Fax: (514) 524-3305

Toll Free: 1-888-794-7749

E-Mail: Info@Swissh.Ca Www.Swissh.Com

